


Pipe Protection Products

HYTECH – ZINC ANODE UNDERGROUND

Composition: Hytech soil zinc anodes are made from 99.99% pure Special High Grade Zinc. This alloy conforms to the composition of ASTM B-418-95 Type II.

Hytech zinc anodes for underground use are produced in a variety of sizes and weights. All of the following anodes are supplied with 1/4" galvanized mild steel core. The standard core extends 4" out one end. Anodes can be supplied bare or packaged in a backfill mixture of 75% Gypsum, 20% Bentonite and 5% Sodium Sulfate. Standard lead wire: #12 THHN, #8 HMWPE, #6 HMWPE or as specified.

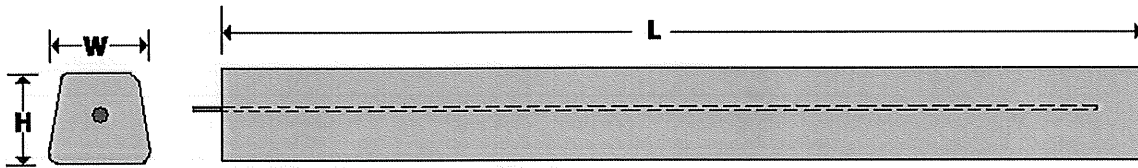

Part No.	Wt.	W	H	L	Pkg.	Diam.	L
	lbs	in	in	in	lbs	in	in
CP-Z05	5	1.4	1.4	9	20	5	15
CP-Z12	12	1.4	1.4	24	40	5	30
CP-Z15	15	2	2	15	36	6	21
CP-Z18	18	1.4	1.4	36	55	5	42
CP-Z30	30	1.4	1.4	60	86	5	66
CP-Z45	45	2	2	45	100	6	51
CP-Z60	60	2	2	60	120	6	66

800 WRAP-A-PIPE

P.O. Box 2064 Huntington Beach CA 92647

714 897-0700 Fax 714 897-0600