

THE 880F4-FL SERIES



CONCRETE. STONE. MASONRY. **UNSTOPPABLE**




880F4-FL MAKES FLUSH CUTS FAST AND SIMPLE.

When you're in a tight spot, choose the 880F4-FL. The unique flush-cut design of these saws allows them to cut within 3/16 inches (4.8 mm) from walls or floors, bringing the precision of Diamond Chain Technology™ to a new level. Available in both 8 and 12 gpm models.

SAW SELECTION

In addition to cutting depth and power requirements, estimated frequency of use is important when selecting a saw. Use the chart below to determine the right saw for your cutting needs.

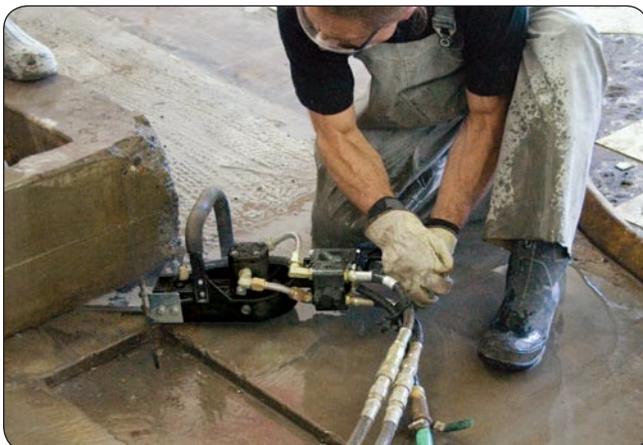

880F4-FL PRODUCT SPECIFICATIONS - 8 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	5700 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	130 in-lbs
HORSEPOWER	11.5 hp
HYDRAULIC SUPPLY	8 gpm (30 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	88 dB @ 3 ft (1 m)
VIBRATION LEVEL	4 meters/second ² (front handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

• Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.

880F4-FL PRODUCT SPECIFICATIONS - 12 GPM

WEIGHT	27.3 lbs (12.4 kg) with 15-inch (38 cm) bar and chain
BAR LENGTH	Up to 25 in (63 cm)
MOTOR SPEED	5300 rpm
POWERHEAD DIMENSIONS	23 in (58.5 cm) length 10.5 in (26.5 cm) height 9.5 in (24 cm) width
TORQUE	207 in-lbs
HORSEPOWER	17.5 hp
HYDRAULIC SUPPLY	12 gpm (45 lpm), 2500 psi (172.5 bar)
NOISE LEVEL	88 dB @ 3 ft (1 m)
VIBRATION LEVEL	4 meters/second ² (front handle)
WATER SUPPLY	Minimum 20 psi (1.5 bar)

• Product data shown is rated based on maximum input conditions and efficiency assumptions and may vary dependent on power supply.